




TECHNOPOL SA
ENERGY SAVING MATERIALS

Installation of Cavity/Polykey Wall Insulation


CAVITY WALL INSULATION

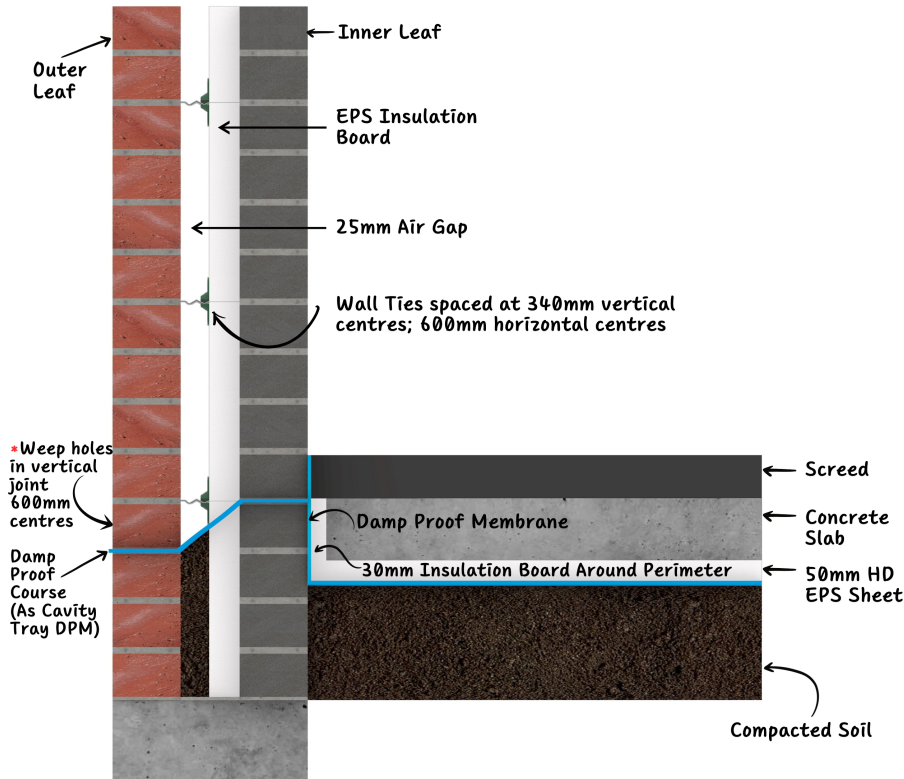


FRCel®

Thermal Properties @20g/l density

Thickness (mm)	30mm	50mm
Thermal Resistance R(m ² K/W) (Bridged R-Value)	1.5	2.0

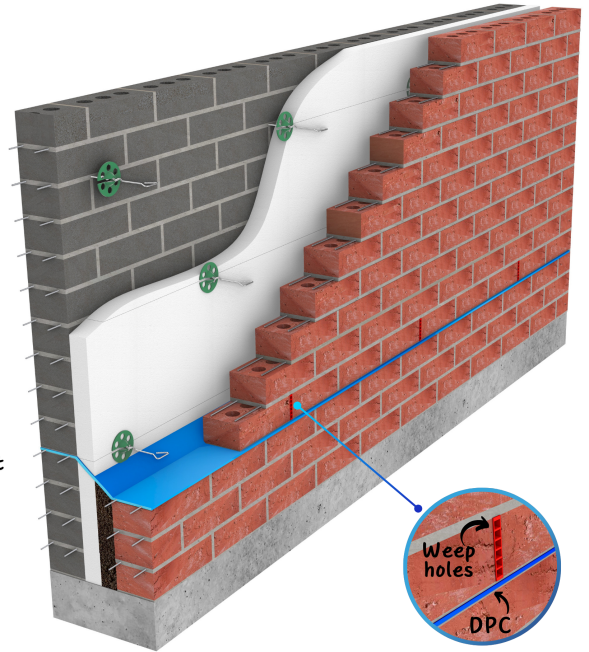

POLYKEY WALL INSULATION

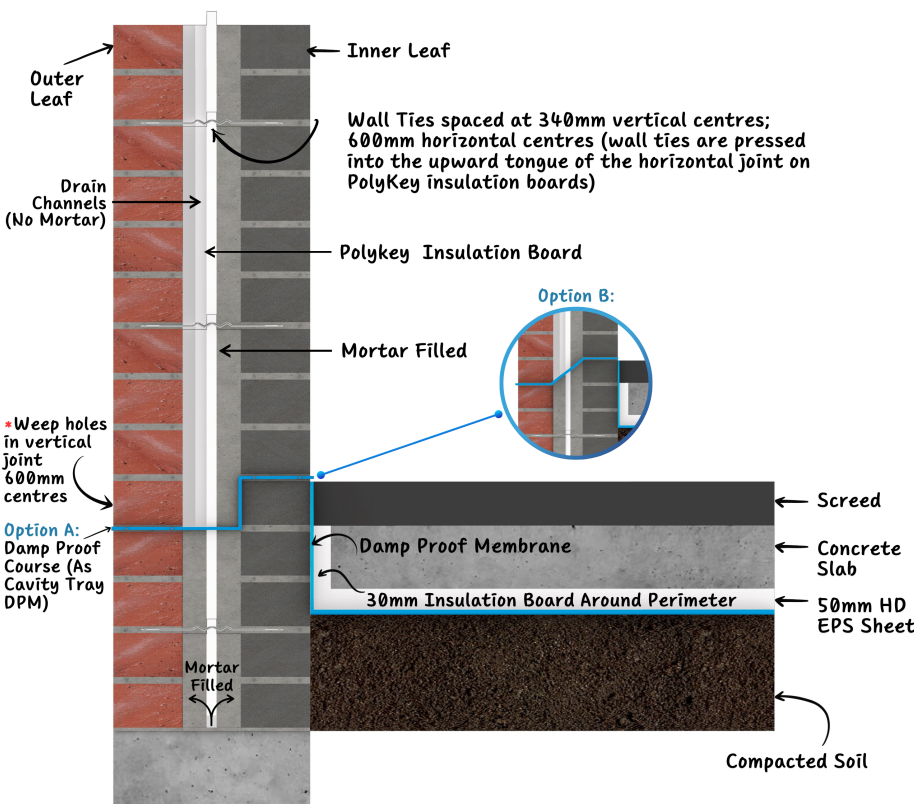

FRCel®

Thermal Properties @20g/l density

Thickness (mm)	60/40mm
Thermal Resistance R(m ² K/W) (As tested in Guarded Hotbox with wall ties)	2.0

